


ASM[®]
innovations in access flooring

PowerTraXX[™]
POWER TRAYS

**Whip End
Extender Cable**
Q2C Modular Cable System

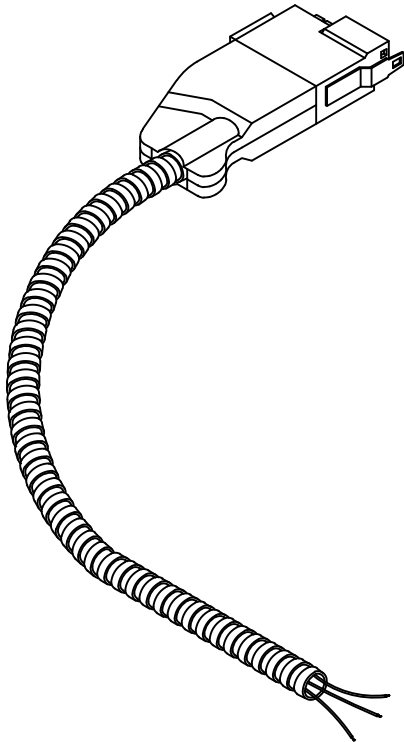

WEC-nn WHIP END EXTENDER CABLE


Description

The function of the WEC-nn Whip End Extender Cable is to carry branch circuit power from any "power out" tap to an ASM Low-Profile Modular Floor Box . Whip End Extender Cables are manufactured with Type MC Cable and feature 90° C insulated #12 AWG, solid copper conductors and a #12 AWG solid copper ground.

Note: #10 AWG is available upon request. Whip End Extender Cables are rated for use on 20 ampere branch circuits and are keyed and color-coded according to specific voltage requirements.

Catalog Number

1 E A * - W - SC



Optional:

- (SC) #10AWG wiring if required
- Whip End Suffix
- * Cable length in feet
- Number of wires
(A = 2-wire w/ground)
- Function (E = Extender Cable)
- Voltage (1 = 120V)

NOTE : IBEW-assembled. UL-Listed and Labeled



NOTE: Cut sheet drawing and information are subject to change without prior notice.

Rev. 9/22

ASM Modular Systems Inc.®

9500 Industrial Center Dr. Ladson, SC, 29456 Tel: 843-534-1110 Fax: 843-534-1111 (www.asmproducts.com)

SCS - 1060